


Superior Siding & Window Color Match Program

WEATHERMASTERTM *Sealant*

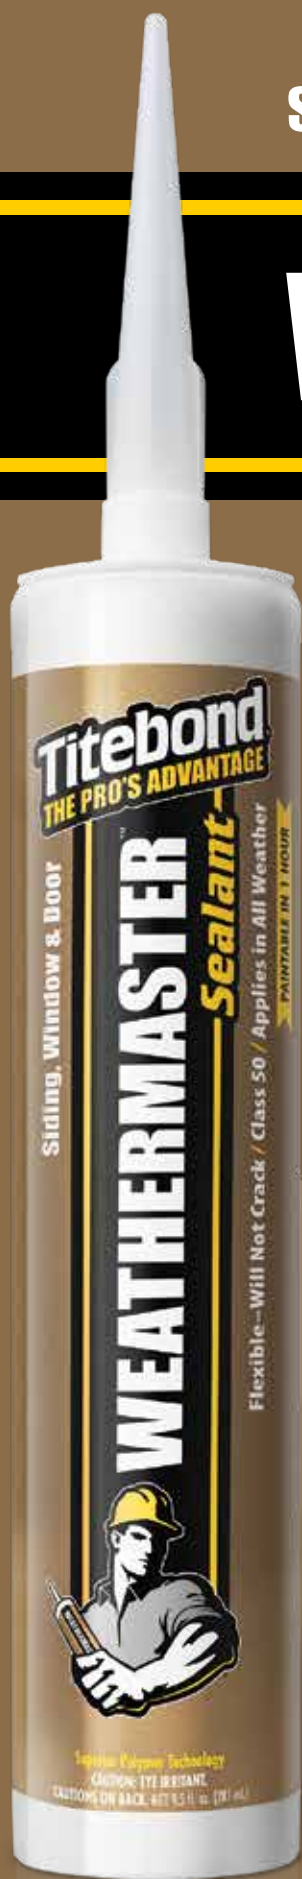

COLOR REFERENCE GUIDE

Titebond[®]
THE PRO'S ADVANTAGE

Basics



44001
White



44021
Blue White



44041
Gray White



45501
Off White



45511
Antique White



44031
Black



43991
Crystal Clear
(Paintable)



44011
Translucent
(Not Paintable)

Color availability is subject to change without notice. Color samples are produced by a printing process that may result in slight color variations. For critical color matching, apply sealant to a sample of the substrate, prior to use. It is the responsibility of the user to determine suitability of the product for the particular substrate.

Please note these colors are not indicative of actual color matches. For an accurate color match, contact us at 1.800.877.4583 or contechs@franklininternational.com.

Green



45601



45651



45711



45731



45761



45771



45851



49201



49211



49221



49231



49241



49261



49271



49291



49301



49311



49321



49331



49341



49351



49371



49381



49391



49621

Blue



45531



45611



45681



45801



49401



49421



49441



49451



49461



49481



49491



49501



49511



49521



49531



49541



49551



49561



49571



49601



49611

Clay



44601



44611



44631



44641



44651



44661



44671



44681



44691



44701



44711



44721



44731



44741



44751



44761



44771



45781



45821

Gray



45591



45691



45811



45841



46601



46631



46651



46661



46671



46681



46691



46711



46721



46751



46761



46771



46781



46791



46811



46841



46861



46881



46891



46901

WEATHERMASTER™ SEALANT

- Extrudes easily from 0°F - 100°F
- Available in over 200 colors
- Can be custom color matched to your project
- Paintable in one hour

COMPARISON GUIDE:

	WeatherMaster™	VOC Solvent	Silicone	Urethane	Tripolymer
PAINTABLE ▶	1 hour (Translucent is not paintable.)	2-4 hours	Not Paintable	2-7 days	24 hours
SHRINKAGE ▶	0%	35%	5%	5%	50%
FLEXIBILITY ▶	50%	25%	25%	25%	25%
COLD WEATHER EXTRUSION ▶	0°F / -18°C	20°F / -7°C	-35°F / -37°C	32°F / 0°C	40°F / 4°C
VOC-COMPLIANT ▶	Yes	Yes	Yes	Yes	Yes
SOLVENT FREE ▶	Yes	No	Yes	No	No
ISOCYANATE FREE ▶	Yes	No	Yes	No	Yes
EARTH FRIENDLY ▶	Yes	No	Yes	No	No
ODOR ▶	Slight	Heavy	Mild	Mild	Heavy
SERVICE TEMPERATURE ▶	-75°F to 212°F -59°C to 100°C	-20°F to 200°F -29°C to 93°C	-45°F to 350°F -43°C to 177°C	-40°F to 180°F -40°C to 82°C	-40°F to 180°F -40°C to 82°C

TITEBOND OFFERS:

- One of the most respected brands among pros
- A comprehensive line of products, including construction and flooring adhesives, wood glues, caulks and sealants
- Outstanding marketing, sales and technical support

Visit Titebond.com for the most up-to-date product information.

Franklin International

Sales & Customer Service: 800.669.4583 /
Technical Service: 800.347.4583

